



Getting Data Initialization on the Server.

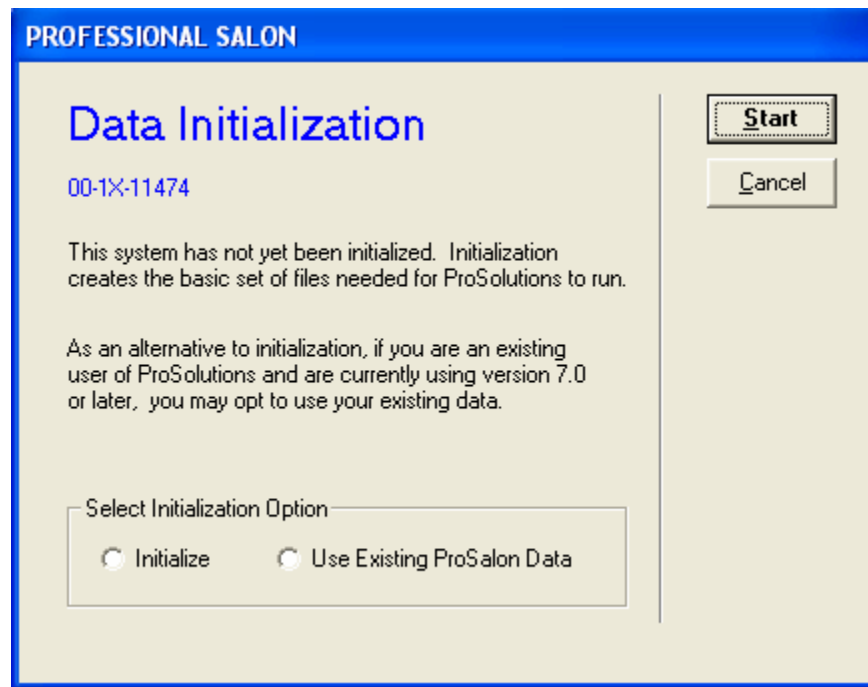


The first thing that you want to do is click cancel on the data initialization screen. Cancel out of all of the error messages that appear.


After canceling out of all of the error messages the next thing to do is right click on your Prosalon icon and select the last option which is properties.

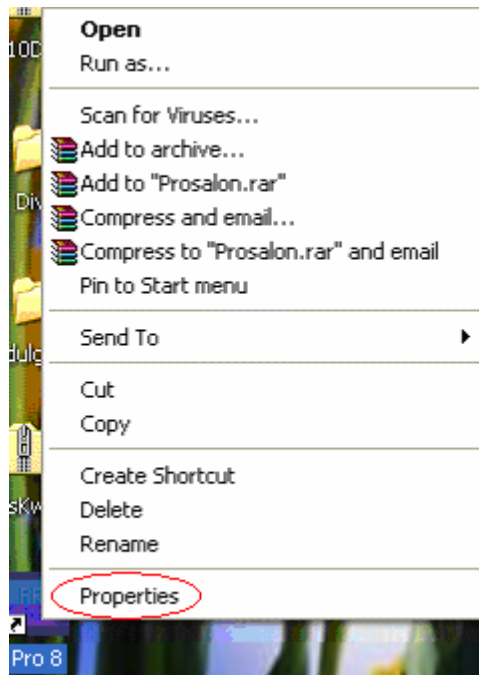


After clicking on properties the Prosalon properties screen should appear. There is a “find target” button at the bottom which you need to click.

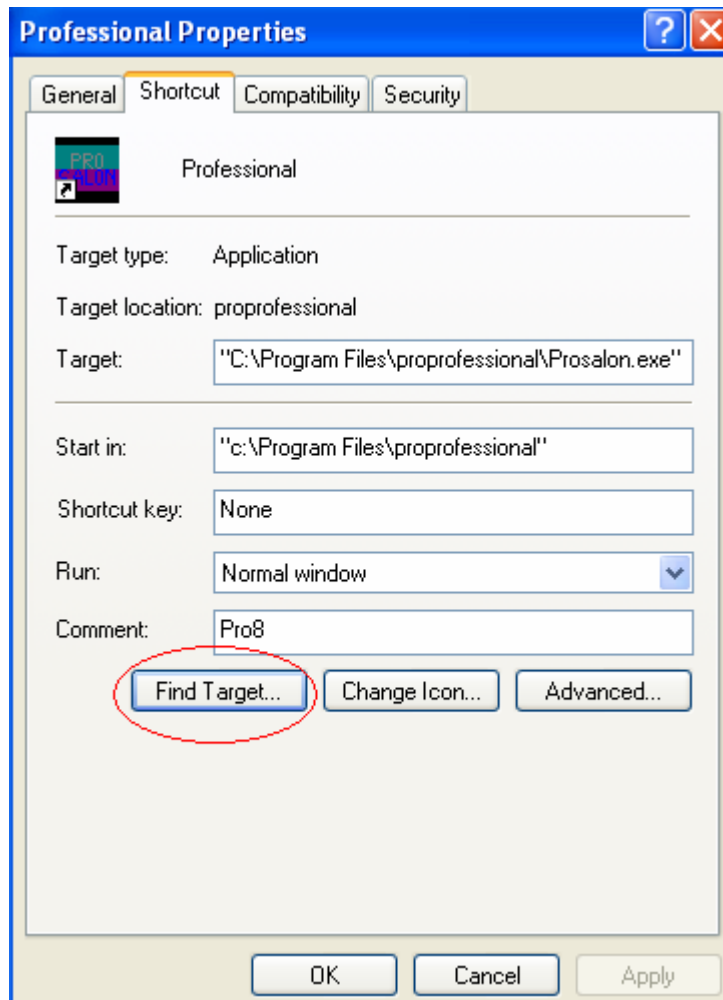


You should now be in a screen that shows all of the Prosalon files. Confirm that you have the file "havedata.yes."

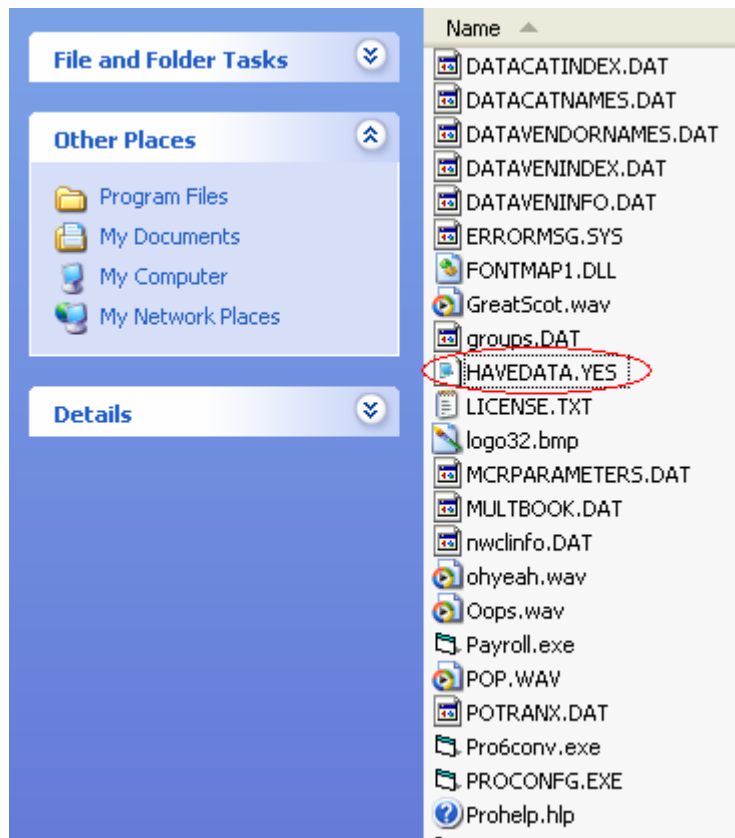

Whether or not you have the file “havedata.yes,” right click on the file “sysconfig.dat,” and delete it.

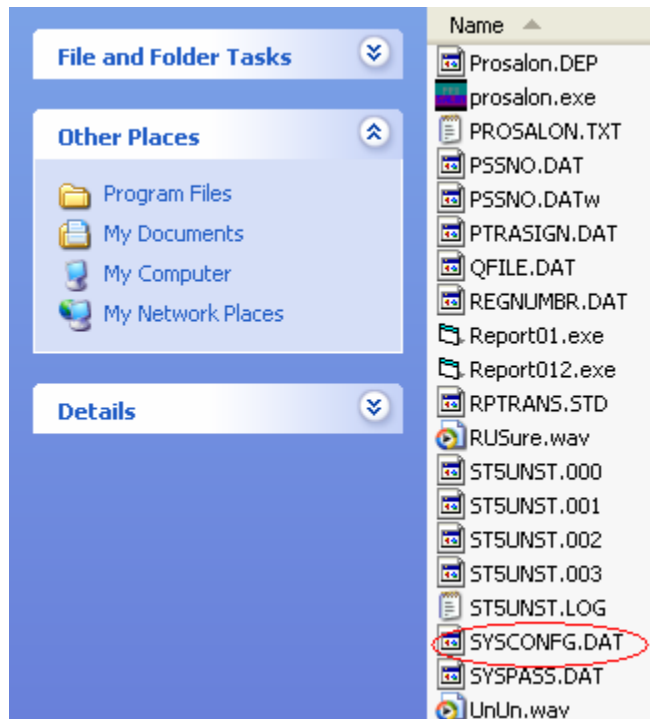

Once deleting your “sysconfig.dat” out of the Prosalon folder, double click on your Prosalon icon. A message should appear asking for your configuration code.

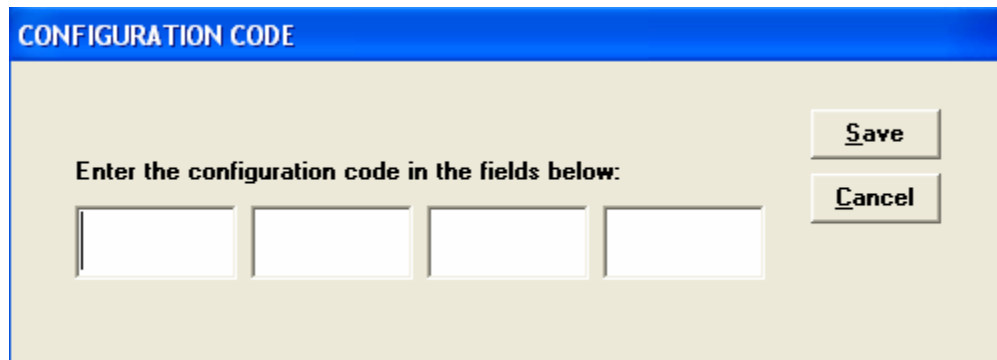

Enter in your server configuration code (which is on the back of your cd case). If you are still getting data initialization then give our technical support a call.

This document was created with Win2PDF available at <http://www.win2pdf.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.
This page will not be added after purchasing Win2PDF.